

Analogue signal splitter 0-20mA 2-G



- galvanic isolation between input and outputs
- power supply 12-24V DC
- input 0-20 mA
- dual isolated outputs 0-20 mA
- maximum tolerance +/- 1 %
- supported 2 and 3 wire sensors
- mounting via screws or to DIN 35 rail


Technical data

Description

Power supply 12-24V DC
 Max Current 100 mA
 Galvanic isolation between input and outputs
 Dual outputs
 Input 0-20 mA
 Output 0-20 mA
 Max tolerance +/-1%
 Supported 2 and 3 wire sensors

Other

Dimensions: 116 X 90 X 42 mm
 Material: ABS
 Color: gray gradient
 Mounting: via screws or to DIN 35 rail
 Working ambient temperature: -20 - +80°C
 Working relative ambient humidity: 0-70% (non-condensing)

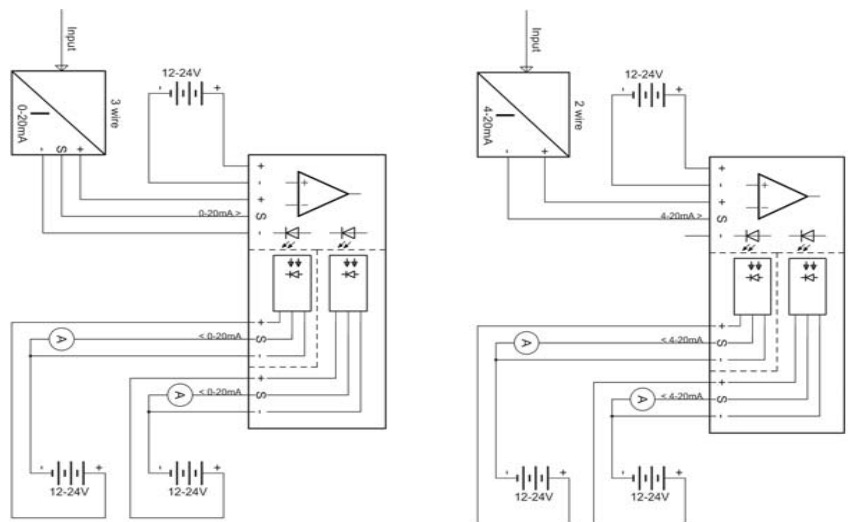

Example of connecting 2 and 3 wire sensor

Dimensions

